


RAKE CHANNEL Metal

(Cross-Section Detail)

Panels **DIRECT** to DECK

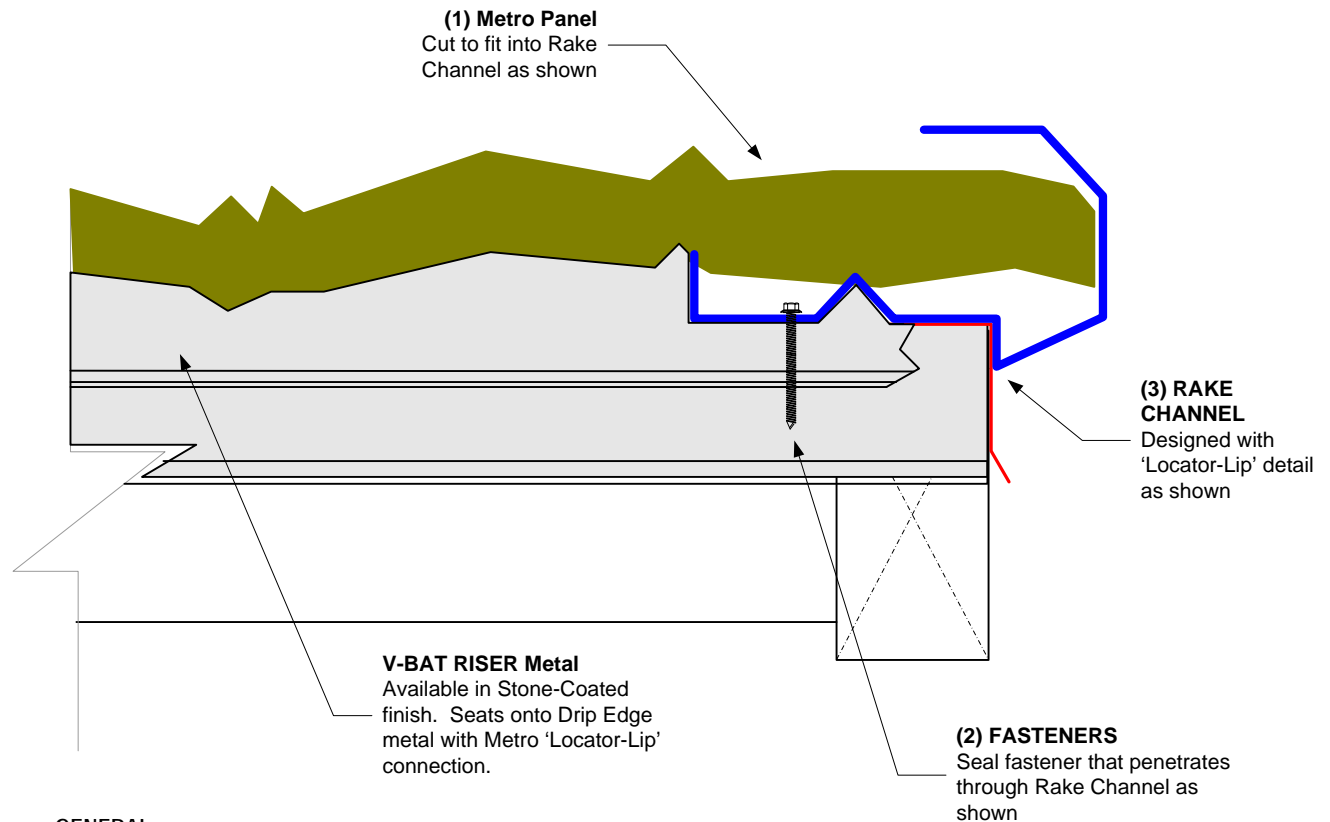

GENERAL:

Metro Rake Channel is designed to be used in conjunction with a Drip Edge as shown and eliminate the use of Trim Caps down the rake-gable area of a roof.

(1) METRO PANEL

MetroSHAKE™ panel is shown in the detail above, application of the Rake Channel is the same for all profiles.

(2) FASTENERS

All fasteners shall be a min of 1,000-hr Salt Spray corrosion resistant to ASTM-B-117.

Nails – 8-d (2-3/8" X .131" dia) Ring Shank w/Super Black coating.

Screws - #10 X 2" Hex Head (No washer) sharp pt. wood grip type colored to match panel. When fastening the Rake Channel it is recommended to seal the fastener as indicated. Fastening pattern to meet local code requirements for perimeter flashing metals.

(3) RAKE CHANNEL

All Metro Rake Channels incorporate a unique 'Locator-Lip' ledge for easy location against the Drip Edge metal as shown.

FILENAME	
006-ASKD-RAKE CHANNEL.VSD	
DATE	REVISED
3-13-06	6/11/2009

Metro Roof Products
3093 'A' Industry St., Oceanside
CA USA 92054
www.metroroofs.com